

Motion Controller

V3.0, 4-Quadrant PWM

with RS232, CANopen or EtherCAT interface

Series MC 5010

Values at 22°C and nominal voltage		MC 5010 S	
Power supply for electronics	U_p	12 ... 50	V
Power supply for motor	U_{mot}	0 ... 50	V
PWM switching frequency	f_{PWM}	100	kHz
Efficiency, electronics	η	97	%
Max. continuous output current	I_{dauer}	10	A
Max. peak output current ¹⁾	I_{max}	30	A
Total standby current (at 24V)	I_{el}	RS / CO: 0,06 ET: 0,07	A
Operating temperature range		- 40 ... + 85	°C
Housing material		aluminium, powder-coated	
Mass		RS / CO: 230 ET: 270	g

¹⁾ S2 mode for max. 3s

Interface	MC 5010 S RS	MC 5010 S CO	MC 5010 S ET
Configuration with Motion Manager 6.0	RS232 / USB	CANopen / USB	RS232 / USB
Fieldbus	RS232	CANopen	EtherCAT


Basic features

- Operation of brushless, DC- and linear motors
- Supported sensor systems: absolute encoders (AES or SSI), incremental encoders (optical or magnetic), Hall sensors (digital or analog), tachometers.
- Position resolution when using analog Hall sensors as position encoders: 4096 increments per revolution.
- 3 digital inputs, 2 digital outputs, 2 analog inputs, flexible configuration.
- Setpoint specification via fieldbus, quadrature signal, pulse and direction or analog inputs.
- Optional stand-alone operation via application programs in all interface versions

Range of functions	MC 5010 S
Operating modes	PP, PV, PT, CSP, CSV, CST and homing acc. to IEC 61800-7-201 or IEC 61800-7-301 as well as position-, speed- and torque control via analog setpoint or voltage controller
Speed range for brushless motors	0 min ⁻¹ ... 30,000 min ⁻¹ (with sinusoidal commutation)
Application programs	Max. 8 application programs (BASIC), one of which is an autostart function
Additional functions	Touch-probe input, connection of a second incremental encoder, control of a holding brake
Indicator	2 LEDs for displaying the operating state Trace as recorder (scope function) or logger
Motor types	DC, BL- and linear motors

Dimensional drawing

Scale reduced

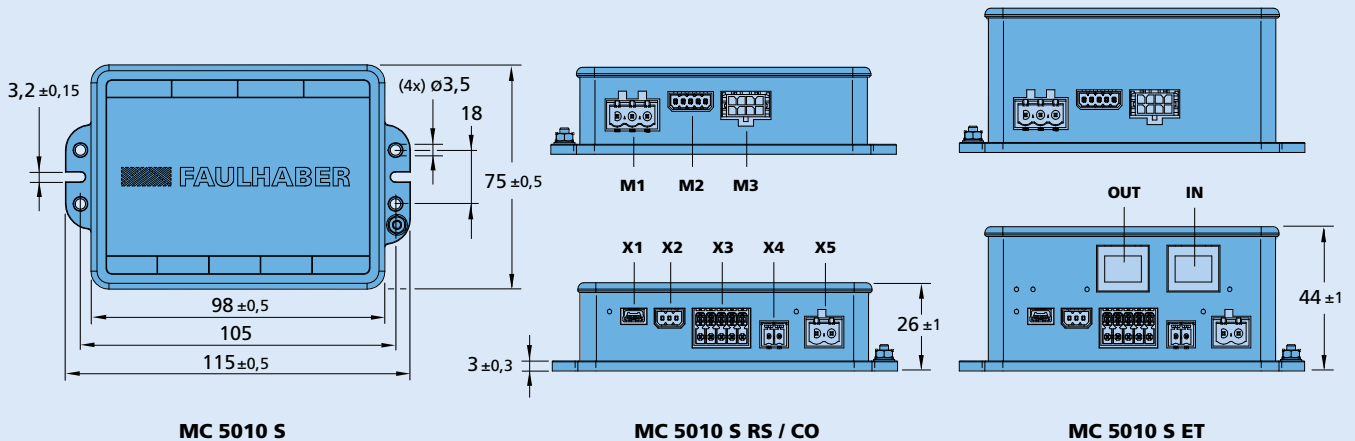

Option, cable and connection information

Example product designation: **MC 5010 S RS**

Option	Type	Description	Connection			
			Name	Function	Input/Output	Description
			X1	Configuration interface		USB
			X2	Fieldbus		RS: RS232 CO: CANOpen
			X3	Input/Output	DigIn1, DigIn2, DigIn3 DigOut1, DigOut2 AnIn1, AnIn2 U _{out} / GND	TTL or PLC level max. 0,7A cont. current ± 10V against AnGND 5V
			X4	Electronic power supply		
			X5	Motor power supply		
			M1	Motor phases	A, B, C	
			M2	Hall sensors	A, B, C U _{out} / GND	digital or analog 5V
			M3	Encoder	A, \bar{A} , B, \bar{B} , I, \bar{I} EN, \bar{EN} , CLOCK, \bar{CLOCK} , DATA, \bar{DATA} U _{out} / GND	max. 5MHz AES or SSI 5V
			IN	Fieldbus		EtherCAT IN
			OUT	Fieldbus		EtherCAT OUT
Note: For details on the connection assignment, see device manual for the MC 5010.						

Product Combination

DC-Motors	Brushless DC-Motors	Linear DC-Servomotors	Cables / Accessories
3242 ... CR 3257 ... CR 3272 ... CR 3863 ... CR 3890 ... CR	3242 ... BX4 3268 ... BX4 3274 ... BP4 3564 ... B 4490 ... B 4490 ... BS		<p>An extensive range of accessories is available for the products of the MC 5010 and 5005 controller series.</p> <p>Included here are connection cables for controller and motor supply, sensors and interfaces, connector sets for motor- and supply side as well as mechanical components for optional DIN rail mounting.</p> <p>Note: Detailed information about the accessories can be found in the accessory manual, which is available for download on our homepage at www.faulhaber.com.</p>