

DC-Micromotors

Graphite Commutation

40 mNm
34 W

Series 2657 ... CXR

Values at 22°C and nominal voltage	2657 W	012 CXR	018 CXR	024 CXR	030 CXR	036 CXR	048 CXR		
1 Nominal voltage	U_N	12	18	24	30	36	48	V	
2 Terminal resistance	R	0,72	1,53	2,98	4,84	6,76	12,61	Ω	
3 Efficiency, max.	η_{max}	81	85	83	84	85	83	%	
4 No-load speed	n_0	5 600	5 500	5 800	5 700	5 800	5 800	min ⁻¹	
5 No-load current, typ. (with shaft \varnothing 4 mm)	I_0	0,104	0,067	0,052	0,041	0,035	0,026	A	
6 Stall torque	M_H	306,7	347,3	302,9	300,7	306,9	283,1	mNm	
7 Friction torque	M_R	2	2	2	2	2	2	mNm	
8 Speed constant	k_n	494	321	247	196	165	122	min ⁻¹ /V	
9 Back-EMF constant	k_E	2,024	3,113	4,05	5,11	6,07	8,205	mV/min ⁻¹	
10 Torque constant	k_M	19,33	29,73	38,67	48,84	58	78,35	mNm/A	
11 Current constant	k_I	0,052	0,034	0,026	0,02	0,017	0,013	A/mNm	
12 Slope of n-M curve	$\Delta n / \Delta M$	18,4	16,5	19	19,4	19,2	19,6	min ⁻¹ /mNm	
13 Rotor inductance	L	90	214	365	579	816	1 500	μ H	
14 Mechanical time constant	τ_m	3,3	2,9	3,4	3,4	3,4	3,5	ms	
15 Rotor inertia	J	17	17	17	17	17	17	gcm ²	
16 Angular acceleration	α_{max}	180	204	178	177	180	172	$\cdot 10^3$ rad/s ²	
17 Thermal resistance	R_{th1} / R_{th2}	4,4 / 12,6						K/W	
18 Thermal time constant	τ_{w1} / τ_{w2}	28 / 810						s	
19 Operating temperature range:									
– motor		-30 ... +100						°C	
– winding, max. permissible		+125						°C	
20 Shaft bearings		sintered bearings (standard)			ball bearings, preloaded (optional version)				
21 Shaft load max.:									
– with shaft diameter		4			4				mm
– radial at 3 000 min ⁻¹ (3 mm from bearing)		10			20				N
– axial at 3 000 min ⁻¹		2			2				N
– axial at standstill		50			20				N
22 Shaft play:									
– radial	\leq	0,03			0,015				mm
– axial	\leq	0,15			0				mm
23 Housing material		steel, zinc galvanized and passivated							
24 Mass		156						g	
25 Direction of rotation		clockwise, viewed from the front face							
26 Speed up to	n_{max}	7 000						min ⁻¹	
27 Number of pole pairs		1							
28 Magnet material		NdFeB							
Rated values for continuous operation									
29 Rated torque	M_N	39	43	40	40	40	40	mNm	
30 Rated current (thermal limit)	I_N	2,4	1,7	1,2	0,97	0,82	0,61	A	
31 Rated speed	n_N	5 040	5 020	5 110	5 050	5 140	5 050	min ⁻¹	


Note: Rated values are calculated with nominal voltage and at a 22°C ambient temperature. The R_{th2} value has been reduced by 25%.


Note:

The diagram indicates the recommended speed in relation to the available torque at the output shaft for a given ambient temperature of 22°C.

The diagram shows the motor in a completely insulated as well as thermally coupled condition (R_{th2} 50% reduced).

The nominal voltage (U_N) curve shows the operating point at nominal voltage in the insulated and thermally coupled condition. Any points of operation above the curve at nominal voltage will require a higher operating voltage. Any points below the nominal voltage curve will require less voltage.

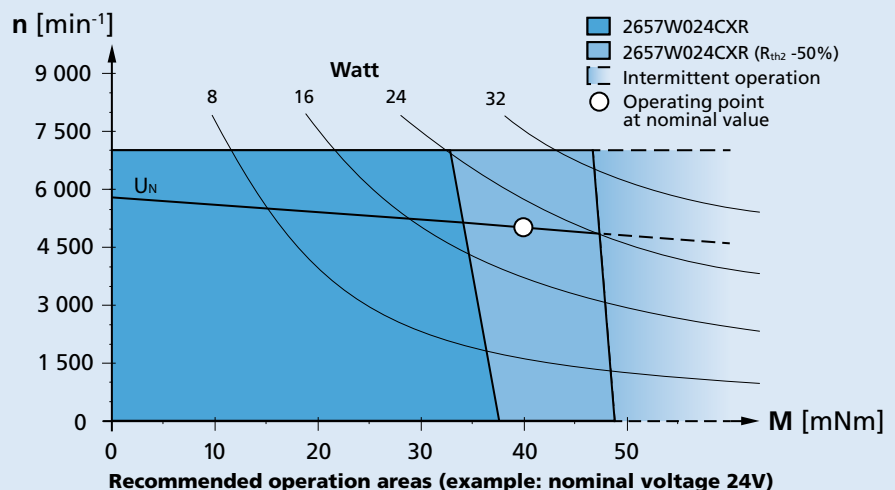

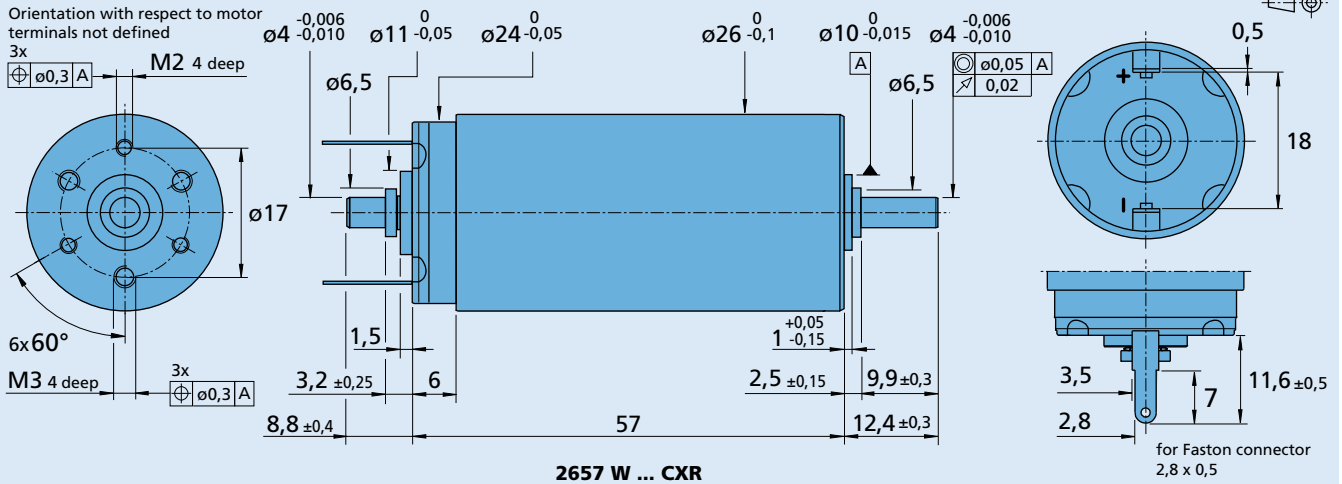Dimensional drawing

Options

 Example product designation: **2657W012CXR-275**

Option	Type	Description
U	Single Leads	For motors with single leads (PTFE), length 160 mm, red (+) / black (-)
158	Shaft end	No second shaft end
275	Ball bearings	Motor with 2 preloaded ball bearings.

Product combination

Precision Gearheads / Lead Screws	Encoders	Drive Electronics	Cables / Accessories
26A	IE3-1024	SC 2402 P	MBZ To view our large range of accessory parts, please refer to the "Accessories" chapter.
26/1	IE3-1024 L	SC 2804 S	
26/1 R	IER53-500	SC 5004 P	
30/1	IER53-500 L	SC 5008 S	
30/1 S	IER3-10000	MCDC 3003 P	
32A	IER3-10000 L	MCDC 3006 S	
BS22-1.5		MC 5004 P	
		MC 5005 S	