

Brushless DC-Servomotors

4 Pole Technology

96 mNm
62 W

Series 3268 ... BX4

Values at 22°C and nominal voltage		3268 G	024 BX4
1	Nominal voltage	U_N	24 V
2	Terminal resistance, phase-phase	R	1,47 Ω
3	Efficiency, max.	η_{max}	81 %
4	No-load speed	n_0	5 500 min^{-1}
5	No-load current, typ. (with shaft \varnothing 5 mm)	I_0	0,183 A
6	Stall torque	M_H	705 mNm
7	Friction torque, static	C_0	1,6 mNm
8	Friction torque, dynamic	C_V	$1,1 \cdot 10^{-3}$ mNm/ min^{-1}
9	Speed constant	k_n	220 min^{-1}/V
10	Back-EMF constant	k_E	4,534 mV/ min^{-1}
11	Torque constant	k_M	43,5 mNm/A
12	Current constant	k_I	0,023 A/mNm
13	Slope of n-M curve	$\Delta n / \Delta M$	7,5 $\text{min}^{-1}/\text{mNm}$
14	Terminal inductance, phase-phase	L	110 μH
15	Mechanical time constant	τ_m	4,9 ms
16	Rotor inertia	J	63 gcm^2
17	Angular acceleration	α_{max}	112 $\cdot 10^3 \text{rad/s}^2$
18	Thermal resistance	R_{th1} / R_{th2}	1,7 / 8,8 K/W
19	Thermal time constant	τ_{w1} / τ_{w2}	16 / 1 080 s
20	Operating temperature range:		
	– motor	-40 ... +100	$^{\circ}\text{C}$
	– winding, max. permissible	+125	$^{\circ}\text{C}$
21	Shaft bearings	ball bearings, preloaded	
22	Shaft load max.:		
	– with shaft diameter	5	mm
	– radial at 3 000 min^{-1} (5 mm from mounting flange)	50	N
	– axial at 3 000 min^{-1} (push only)	5	N
	– axial at standstill (push only)	50	N
23	Shaft play:		
	– radial	\leq 0,015	mm
	– axial	$=$ 0	mm
24	Housing material	stainless steel	
25	Mass	290	g
26	Direction of rotation	electronically reversible	
27	Speed up to	n_{max} 12 000	min^{-1}
28	Number of pole pairs	2	
29	Hall sensors	digital	
30	Magnet material	NdFeB	
Rated values for continuous operation			
31	Rated torque	M_N	72 mNm
32	Rated current (thermal limit)	I_N	2 A
33	Rated speed	n_N	4 890 min^{-1}


Note: Rated values are calculated with nominal voltage and at a 22°C ambient temperature. The R_{th2} value has been reduced by 25%.

Note:


The diagram indicates the recommended speed in relation to the available torque at the output shaft for a given ambient temperature of 22°C.

The diagram shows the motor in a completely insulated as well as thermally coupled condition (R_{th2} 50% reduced).

The nominal voltage (U_N) curve shows the operating point at nominal voltage in the insulated and thermally coupled condition. Any points of operation above the curve at nominal voltage will require a higher operating voltage. Any points below the nominal voltage curve will require less voltage.

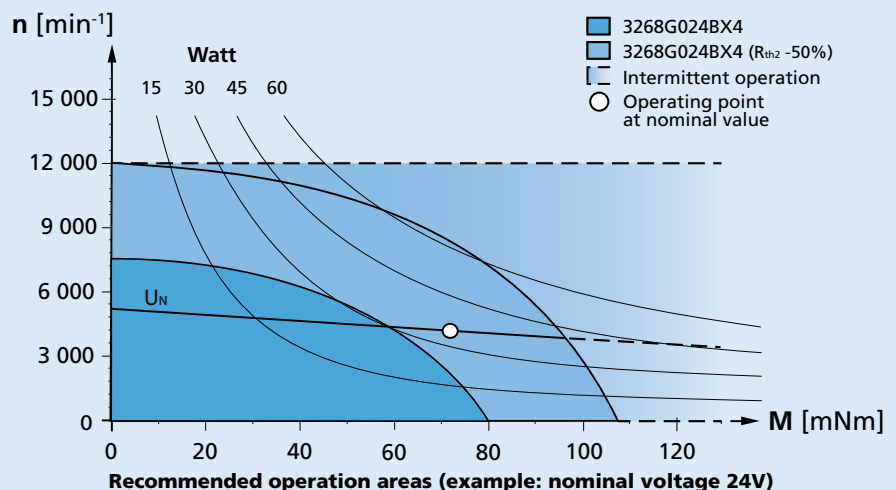

Dimensional drawing

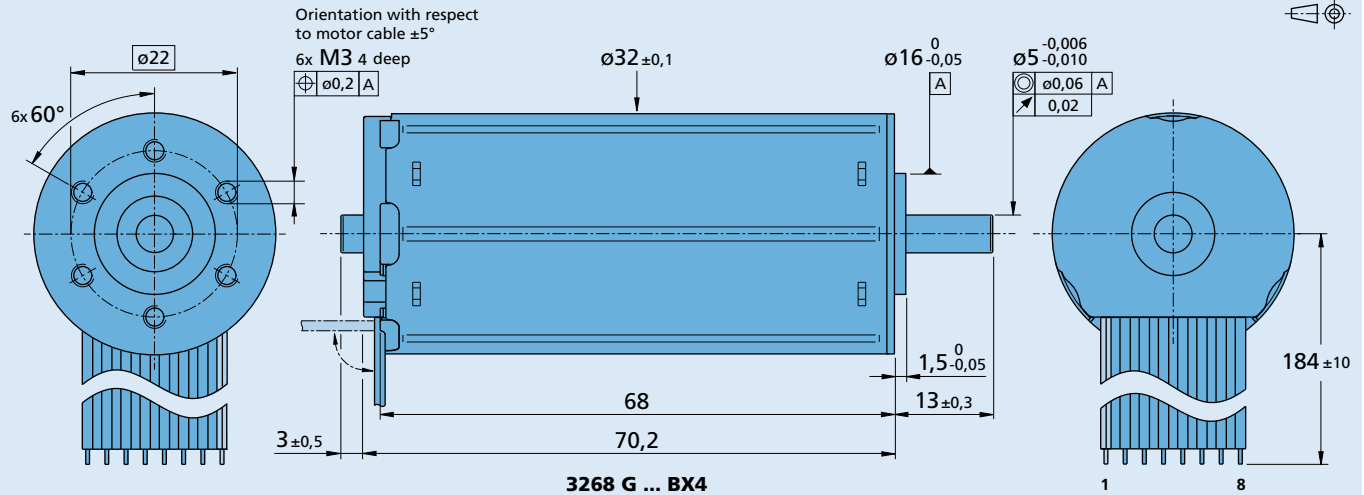

Option, cable and connection information

Example product designation: **3268G024BX4-3692**

Option	Type	Description	Connection standard	
			No.	Function
3830	Connector	AWG 26 / PVC ribbon cable with connector MOLEX Microfit 3.0, 43025-0800, recommended mating connector 43020-0800	1	Phase C
4935	Single wires	Motor with single wires (PTFE), length 184 mm, AWG22	2	Phase B
X4935	Single wires	Motor with single wires (PTFE), length 300 mm, AWG22	3	Phase A
Y4935	Single wires	Motor with single wires (PTFE), length 600 mm, AWG22	4	GND
4747	Temperature range	Up to 150°C, winding max. 150°C, with single wires (PTFE), length 184 mm, AWG22	5	U _{DD} (+5V)
X4747	Temperature range	Up to 150°C, winding max. 150°C, with single wires (PTFE), length 300 mm, AWG22	6	Hall sensor C
Y4747	Temperature range	Up to 150°C, winding max. 150°C, with single wires (PTFE), length 600 mm, AWG22	7	Hall sensor B
Y158	Shaft end	Motor without second shaft end	8	Hall sensor A
3692	Controller combination	Analog Hall sensors for combination with Motion Controller MCBL		

Option: 4935/4747		
Function	Colour	
Phase C	yellow	
Phase B	orange	
Phase A	brown	
GND	black	
U _{DD} (+5V)	red	
Hall sensor C	grey	
Hall sensor B	blue	
Hall sensor A	green	

Standard cable
 Insulation: PVC
 8 conductors, AWG 24
 pitch 2,54 mm, wires tinned

Product combination

Precision Gearheads / Lead Screws	Encoders	Drive Electronics	Cables / Accessories
32A 32ALN 32/3 32/3 S 38/1 38/1 S 38/2 38/2 S BS32-2.0	IE3-1024 IE3-1024 L IER3-10000 IER3-10000 L AES-4096	SC 2804 SC 5004 SC 5008 MC 5004 MC 5005 MC 5010 MCBL 3003 MCBL 3006	MBZ To view our large range of accessory parts, please refer to the "Accessories" chapter.