

Brushless DC-Servomotors

4 Pole Technology

165 mNm
150 W

Series 3274 ... BP4

Values at 22°C and nominal voltage		3274 G	024 BP4
1	Nominal voltage	U_N	24 V
2	Terminal resistance, phase-phase	R	0,25 Ω
3	Efficiency, max.	η_{max}	89 %
4	No-load speed	n_0	8 700 min^{-1}
5	No-load current, typ. (with shaft \varnothing 5 mm)	I_0	0,384 A
6	Stall torque	M_H	2 697 mNm
7	Friction torque, static	C_0	2,9 mNm
8	Friction torque, dynamic	C_V	$8,2 \cdot 10^{-4}$ mNm/ min^{-1}
9	Speed constant	k_n	336 min^{-1}/V
10	Back-EMF constant	k_E	2,97 mV/ min^{-1}
11	Torque constant	k_M	28,4 mNm/A
12	Current constant	k_I	0,035 A/mNm
13	Slope of n-M curve	$\Delta n / \Delta M$	3 $\text{min}^{-1}/\text{mNm}$
14	Terminal inductance, phase-phase	L	60 μH
15	Mechanical time constant	τ_m	1,5 ms
16	Rotor inertia	J	48 gcm^2
17	Angular acceleration	α_{max}	562 $\cdot 10^3 \text{rad/s}^2$
18	Thermal resistance	R_{th1} / R_{th2}	0,7 / 8 K/W
19	Thermal time constant	τ_{w1} / τ_{w2}	14 / 965 s
20	Operating temperature range:		
	– motor	-40 ... +125	$^{\circ}\text{C}$
	– winding, max. permissible	+150	$^{\circ}\text{C}$
21	Shaft bearings	ball bearings, preloaded	
22	Shaft load max.:		
	– with shaft diameter	5	mm
	– radial at 3 000 min^{-1} (5 mm from mounting flange)	50	N
	– axial at 3 000 min^{-1} (push only)	5	N
	– axial at standstill (push only)	50	N
23	Shaft play:		
	– radial	\leq 0,015	mm
	– axial	$=$ 0	mm
24	Housing material	stainless steel	
25	Mass	320	g
26	Direction of rotation	electronically reversible	
27	Speed up to	n_{max} 16 000	min^{-1}
28	Number of pole pairs	2	
29	Hall sensors	digital	
30	Magnet material	NdFeB	
Rated values for continuous operation			
31	Rated torque	M_N	111,2 mNm
32	Rated current (thermal limit)	I_N	4,8 A
33	Rated speed	n_N	8 490 min^{-1}


Note: Rated values are calculated with nominal voltage and at a 22°C ambient temperature. The R_{th2} value has been reduced by 25%.


Note:

The diagram indicates the recommended speed in relation to the available torque at the output shaft for a given ambient temperature of 22°C.

The diagram shows the motor in a completely insulated as well as thermally coupled condition (R_{th2} 50% reduced).

The nominal voltage (U_N) curve shows the operating point at nominal voltage in the insulated and thermally coupled condition. Any points of operation above the curve at nominal voltage will require a higher operating voltage. Any points below the nominal voltage curve will require less voltage.

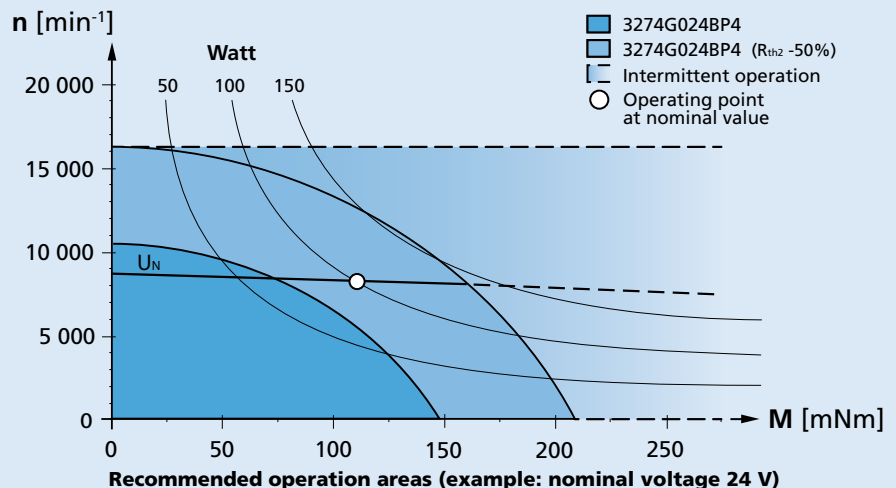

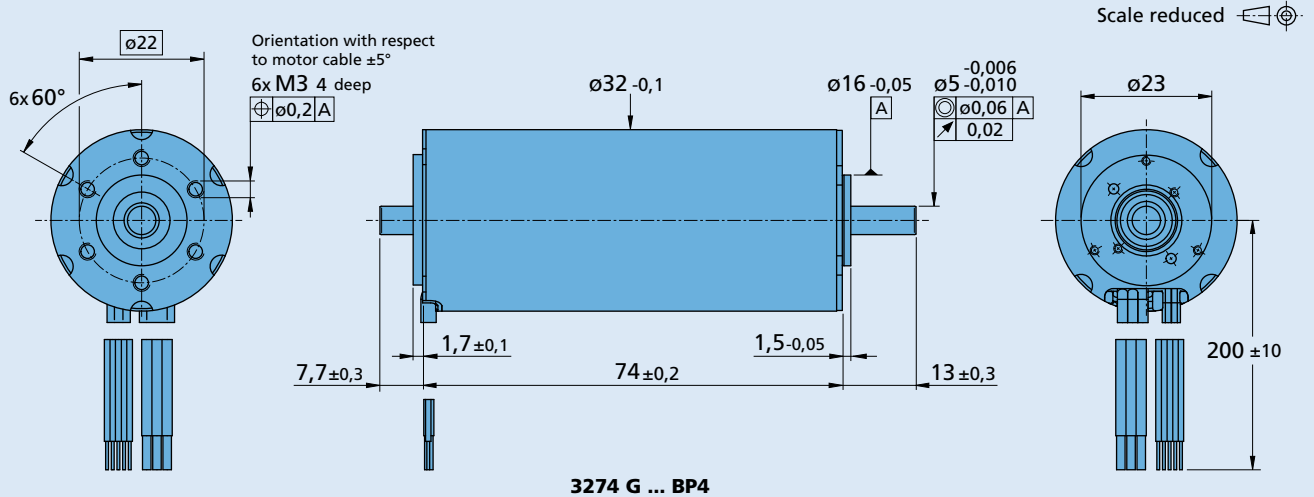Dimensional drawing

Option, cable and connection information

 Example product designation: **3274G024BP4-3692**

Option	Type	Description	Connection	
			Function	Colour
Y158	Shaft end	Motor without second shaft end	Phase C	yellow
3692	Controller combination	Analog Hall sensors for combination with Motion Controller MCBL	Phase B	orange
			Phase A	brown
			GND	black
			U _{DD} (+5V)	red
			Hall sensor C	grey
			Hall sensor B	blue
			Hall sensor A	green
			Standard cable	
			3 single wires, material FEP, AWG 18, Phase A/B/C	
			5 single wires, material PTFE, AWG 26, Hall A/B/C, U _{DD} , GND	

Product combination

Precision Gearheads / Lead Screws	Encoders	Drive Electronics	Cables / Accessories
32A 32ALN 32/3 32/3 S 38A 38/1 38/1 S 38/2 38/2 S BS32-2.0	IE3-1024 IE3-1024 L IERS3-500 IERS3-500 L IER3-10000 IER3-10000 L	SC 5008 MC 5010 MCBL 3006	To view our large range of accessory parts, please refer to the "Accessories" chapter.